


Core Data Sheet

Part Number: G62 - DF60

Core Dimensions:

Uncoated (tol. +/-0.25)		After coating	
OD (mm)	16.64	(max)	17.29
ID (mm)	10.16	(min)	9.51
HT (mm)	6.35	(max)	7.00

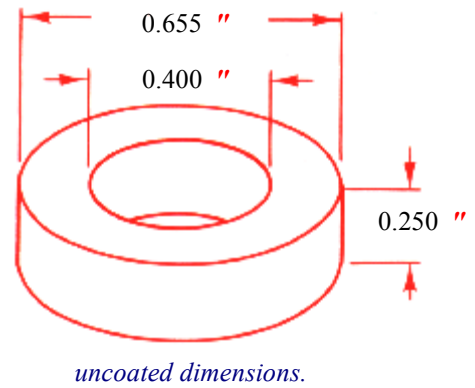

Physical Characteristics:

Winding area (cm ²)	0.73	Strength (N) typ.	148.5
Surface area (cm ²)	13.22	Weight (grams) typ.	5.72
Coating	Epoxy, Light Green, 0.2 mm approx. per surface. Voltage breakdown 500Vac.		
Packing	Not available.		

Material:

Grade	DF60		
Initial Permeability (μi)	60	tol +/-	5
Description	DuraFlux - composite Silicon-iron alloy powder.		

Electrical Data:

AL norm (nH)	35.00		
AL max. (nH)	37.80		
AL min. (nH)	32.20		
DC bias at 0.8μi (Oe) typ.	80		
Power Losses (mW/cm ³) typ. 50kHz, 1000gauss		1000	
Total Losses (ohms/H/μi) typ. < 20gauss		0.0	

Magnetic Dimensions:

C1 (mm-1)	2.0791
Le (mm)	40.4
Ae (mm ²)	19.4
Ve (mm ³)	786.5

Special Comments

- 1.
- 2.
- 3.

Note: the right to change specification data as required without notice is reserved.