


Core Data Sheet

Part Number: G63 - DF60

Core Dimensions:

Uncoated (tol. +/-0.25)	After coating	
OD (mm) 7.87	(max)	8.52
ID (mm) 3.96	(min)	3.31
HT (mm) 3.18	(max)	3.83

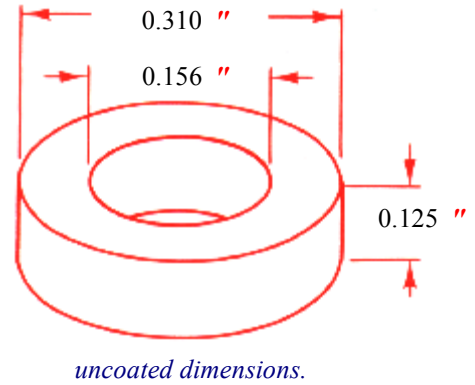

Physical Characteristics:

Winding area (cm ²)	0.09	Strength (N) typ.	44.0
Surface area (cm ²)	2.77	Weight (grams) typ.	0.76
Coating	Epoxy, Light Green, 0.2 mm approx. per surface. Voltage breakdown 500Vac.		
Packing	Not available.		

Material:

Grade	DF60		
Initial Permeability (μi)	60	tol +/-	5
Description	DuraFlux - composite Silicon-iron alloy powder.		

Electrical Data:

AL norm (nH)	25.00	
AL max. (nH)	28.00	
AL min. (nH)	22.00	
DC bias at 0.8μi (Oe) typ.	80	
Power Losses (mW/cm ³) typ. 50kHz, 1000gauss	1000	
Total Losses (ohms/H/μi) typ. < 20gauss	0.0	

Magnetic Dimensions:

C1 (mm-1)	2.9999
Le (mm)	17.2
Ae (mm ²)	5.7
Ve (mm ³)	98.6

Special Comments

- 1.
2. AL band is +/- 12% for DuraFlux
- 3.

Note: the right to change specification data as required without notice is reserved.