


Core Data Sheet

Part Number: G64 - DF60

Core Dimensions:

Uncoated (tol. +/-0.25)	After coating	
OD (mm) 6.60	(max)	7.25
ID (mm) 2.67	(min)	2.02
HT (mm) 4.78	(max)	5.43

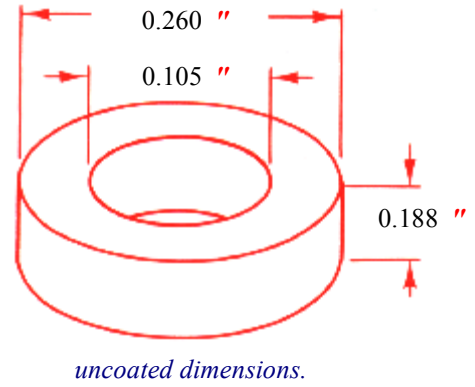

Physical Characteristics:

Winding area (cm ²)	0.04	Strength (N) typ.	64.7
Surface area (cm ²)	2.28	Weight (grams) typ.	0.90
Coating	Epoxy, Light Green, 0.2 mm approx. per surface. Voltage breakdown 500Vac.		
Packing	Not available.		

Material:

Grade	DF60		
Initial Permeability (μi)	60	tol +/-	5
Description	DuraFlux - composite Silicon-iron alloy powder.		

Electrical Data:

AL norm (nH)	50.00		
AL max. (nH)	56.00		
AL min. (nH)	44.00		
DC bias at 0.8μi (Oe) typ.	80		
Power Losses (mW/cm ³) typ. 50kHz, 1000gauss		1000	
Total Losses (ohms/H/μi) typ. < 20gauss		0.0	

Magnetic Dimensions:

C1 (mm-1)	1.5051
Le (mm)	12.7
Ae (mm ²)	8.5
Ve (mm ³)	108.0

Special Comments

- 1.
2. AL band is +/- 10% for MPP & High Flux
3. AL band is +/- 12% for DuraFlux

Note: the right to change specification data as required without notice is reserved.