


Core Data Sheet

Part Number: G64B - DF60

Core Dimensions:

Uncoated (tol. +/-0.25)	After coating	
OD (mm) 6.60	(max)	7.25
ID (mm) 2.67	(min)	2.02
HT (mm) 2.54	(max)	3.19

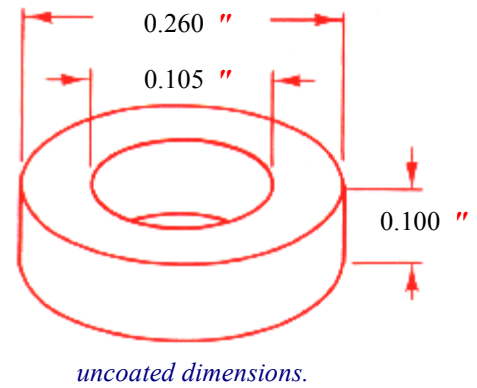

Physical Characteristics:

Winding area (cm ²)	0.04	Strength (N) typ.	40.0
Surface area (cm ²)	1.77	Weight (grams) typ.	0.48
Coating	Epoxy, Light Green, 0.2 mm approx. per surface. Voltage breakdown 500Vac.		
Packing	Not available.		

Material:

Grade	DF60		
Initial Permeability (μi)	60	tol +/-	5
Description	DuraFlux - composite Silicon-iron alloy powder.		

Electrical Data:

AL norm (nH)	26.00	
AL max. (nH)	29.12	
AL min. (nH)	22.88	
DC bias at 0.8μi (Oe) typ.	80	
Power Losses (mW/cm ³) typ. 50kHz, 1000gauss	1000	
Total Losses (ohms/H/μi) typ. < 20gauss	0.0	

Magnetic Dimensions:

C1 (mm-1)	2.9261
Le (mm)	12.7
Ae (mm ²)	4.4
Ve (mm ³)	55.5

Special Comments

- 1.
2. AL band is +/- 10% for MPP & High Flux
3. AL band is +/- 12% for DuraFlux

Note: the right to change specification data as required without notice is reserved.