



**Performance graphs**

ER core (p/n SMD-E-12.5-4.5-001) and I core (p/n SMD-I-12.5-1.45-001) tested with 4½ turn flat coil. Nominal inductance is 1.4µH at 100kHz, 0.1Vac. Minimum inductance at 30Adc is 1.12µH. The inductance verses dc bias and frequency graphs below are tested at 100kHz, 0.1Vac and 25Adc at 25°C.

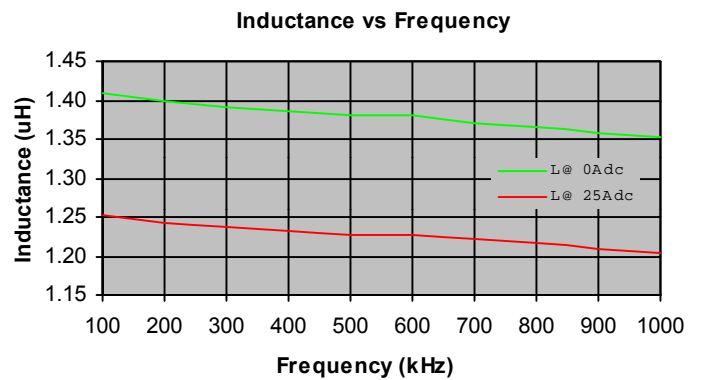

*Note: the right to change specification data as required without notice is reserved.*

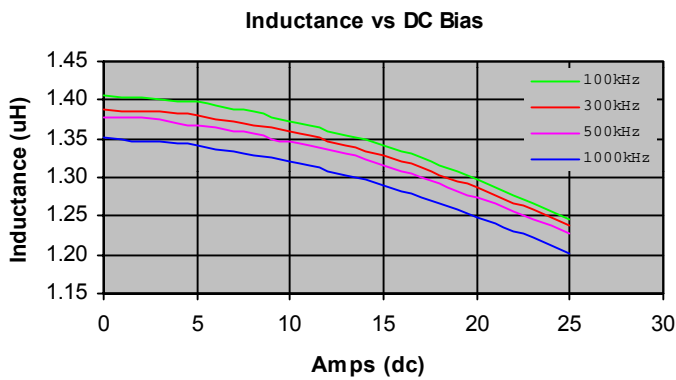