


Core Data Sheet

Part Number: G49- 86

Core Dimensions:

| Uncoated (tol. +/-0.25) | After coating | |
|-------------------------|---------------|-------|
| OD (mm) 35.81 | (max) | 36.46 |
| ID (mm) 22.35 | (min) | 21.70 |
| HT (mm) 10.46 | (max) | 11.11 |

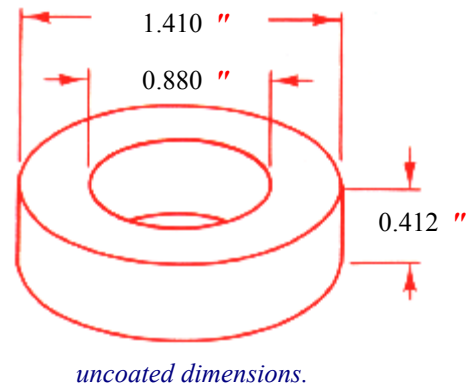

Physical Characteristics:

| | | | |
|---------------------------------|--------------------------------------------------------------------------|---------------------|-------|
| Winding area (cm ²) | 3.75 | Strength (N) typ. | 484.3 |
| Surface area (cm ²) | 57.64 | Weight (grams) typ. | 48.24 |
| Coating | Epoxy, Light Blue, 0.2 mm approx. per surface. Voltage breakdown 500Vac. | | |
| Packing | Not available. | | |

Material:

| | | | |
|---------------------------|----------------------------------------------------------|---------|----|
| Grade | 86 | | |
| Initial Permeability (μi) | 147 | tol +/- | 12 |
| Description | High Flux - gas atomized 80 /20 nickel-iron alloy powder | | |

Electrical Data:

| | | |
|----------------------------------------------------------|--------|--|
| AL norm (nH) | 138.00 | |
| AL max. (nH) | 149.04 | |
| AL min. (nH) | 126.96 | |
| DC bias at 0.8μi (Oe) typ. | 24 | |
| Power Losses (mW/cm ³) typ. 50kHz, 1000gauss | 600 | |
| Total Losses (ohms/H/μi) typ. < 20gauss | 0.0 | |

Magnetic Dimensions:

| | |
|-----------------------|--------|
| C1 (mm-1) | 1.3527 |
| Le (mm) | 88.1 |
| Ae (mm ²) | 65.1 |
| Ve (mm ³) | 5732.7 |

Special Comments

- 1.
- 2.
- 3.

Note: the right to change specification data as required without notice is reserved.