


Core Data Sheet

Part Number: G51A-86

Core Dimensions:

Uncoated (tol. +/-0.25)		After coating
OD (mm)	9.65	(max) 10.30
ID (mm)	4.78	(min) 4.13
HT (mm)	3.96	(max) 4.61

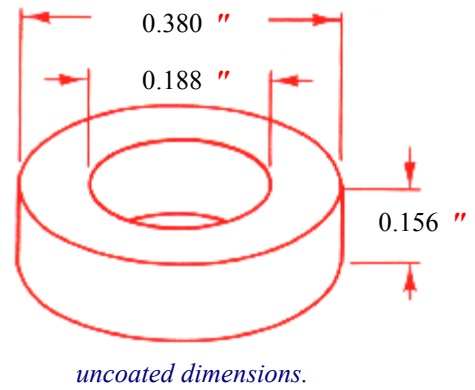

Physical Characteristics:

Winding area (cm ²)	0.14	Strength (N) typ.	68.2
Surface area (cm ²)	4.16	Weight (grams) typ.	1.64
Coating	Epoxy, Light Blue, 0.2 mm approx. per surface. Voltage breakdown 500Vac.		
Packing	Not available.		

Material:

Grade	86		
Initial Permeability (μi)	147	tol +/-	12
Description	High Flux - gas atomized 80 /20 nickel-iron alloy powder		

Electrical Data:

AL norm (nH)	78.00	
AL max. (nH)	84.24	
AL min. (nH)	71.76	
DC bias at 0.8μi (Oe) typ.	24	
Power Losses (mW/cm ³) typ. 50kHz, 1000gauss	600	
Total Losses (ohms/H/μi) typ. < 20gauss	0.0	

Magnetic Dimensions:

C1 (mm-1)	2.3820
Le (mm)	20.9
Ae (mm ²)	8.8
Ve (mm ³)	183.5

Special Comments

- 1.
2. AL band is +/- 12% for DuraFlux
- 3.

Note: the right to change specification data as required without notice is reserved.