


Core Data Sheet

Part Number: G50-98

Core Dimensions:

Uncoated (tol. +/-0.25)		After coating
OD (mm)	10.16	(max) 10.81
ID (mm)	5.08	(min) 4.43
HT (mm)	3.96	(max) 4.61

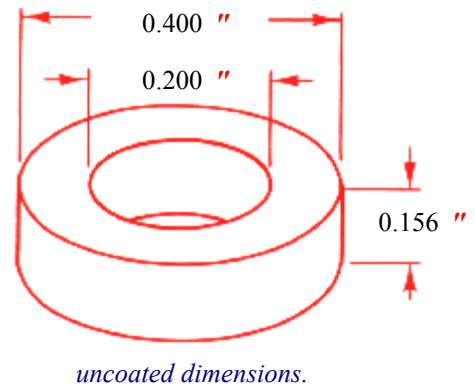

Physical Characteristics:

Winding area (cm ²)	0.16	Strength (N) typ.	71.2
Surface area (cm ²)	4.55	Weight (grams) typ.	1.95
Coating	Epoxy, Dark Blue, 0.2 mm approx. per surface. Voltage breakdown 500Vac.		
Packing	Not available.		

Material:

Grade	98		
Initial Permeability (μi)	173	tol +/-	12
Description	MPP - gas atomized 80 /20 nickel-iron alloy powder.		

Electrical Data:

AL norm (nH)	92.00	
AL max. (nH)	99.36	
AL min. (nH)	84.64	
DC bias at 0.8μi (Oe) typ.	18	
Power Losses (mW/cm ³) typ. 50kHz, 1000gauss	400	
Total Losses (ohms/H/μi) typ. < 20gauss	0.2	

Magnetic Dimensions:

C1 (mm-1)	2.4008
Le (mm)	22.1
Ae (mm ²)	9.2
Ve (mm ³)	203.9

Special Comments

- 1.
2. AL band is +/- 12% for DuraFlux
- 3.

Note: the right to change specification data as required without notice is reserved.