


MnZn Ferrite EI Cores

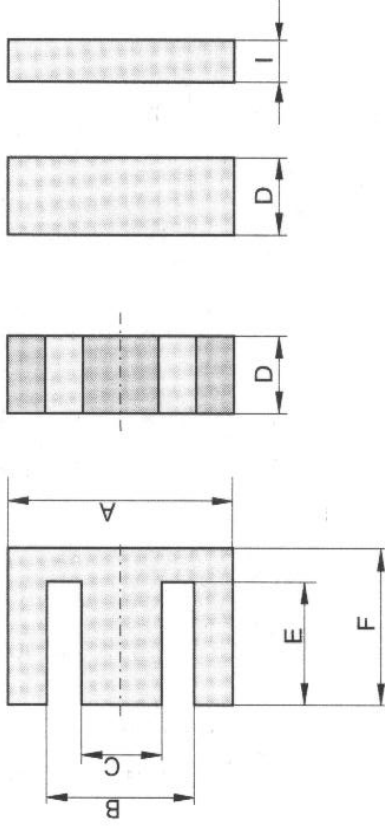

Part no.	Dimensions (mm)										C1 (mm-1)	Le (mm)	Ae (mm ²)	Ve (mm ³)	Weight (g)	AL (nH/N ²) ±25%
	A	B	C	D	E	F	I									
EI22	22.0 ±0.3	13.0 min	5.75 ±0.25	5.75 ±0.25	10.55 ±0.25	14.55 ±0.25	4.5 ±0.2	0.96	39.60	41.40	1639.44	10.00	2300µi	2400		
EI25	25.4 ±0.4	19.0 min	6.35 ±0.3	6.35 ±0.25	12.5 ±0.3	15.8 ±0.3	3.2 ±0.2	1.20	48.00	39.90	1915.20	10.00	1900			
EI28	28.0 ±0.5	18.7 min	7.2 ±0.3	10.6 ±0.2	12.25 ±0.25	16.75 ±0.25	3.5 ±0.3	0.58	48.60	83.20	4043.52	23.50	3800			
EI32	31.8 ±0.5	24.0 min	6.35 ±0.2	20.3 ±0.25	7.3 ±0.2	10.5 ±0.2	3.2 ±0.2	0.32	43.00	133.00	5719.00	29.00				
EI33	33.0 ±0.5	23.6 min	9.7 ±0.3	12.7 ±0.3	19.25 ±0.25	23.75 ±0.25	5.0 ±0.3	0.57	67.50	118.00	7965.00	40.60	3800			
EI40	40.0 ±0.5	26.8 min	11.7 ±0.3	11.7 ±0.3	21.3 ±0.3	27.3 ±0.3	6.5 ±0.3	0.54	77.50	143.00	11082.50	59.00	4500			