


Core Data Sheet

Part Number: G50 - DF60

Core Dimensions:

Uncoated (tol. +/-0.25)	After coating	
OD (mm) 10.16	(max)	10.81
ID (mm) 5.08	(min)	4.43
HT (mm) 3.96	(max)	4.61

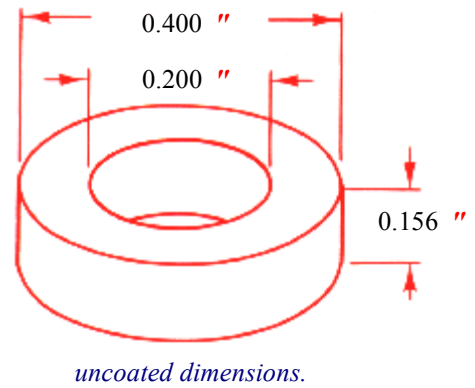

Physical Characteristics:

Winding area (cm ²)	0.16	Strength (N) typ.	71.2
Surface area (cm ²)	4.55	Weight (grams) typ.	1.59
Coating	Epoxy, Light Green, 0.2 mm approx. per surface. Voltage breakdown 500Vac.		
Packing	Not available.		

Material:

Grade	DF60		
Initial Permeability (μi)	60	tol +/-	5
Description	DuraFlux - composite Silicon-iron alloy powder.		

Electrical Data:

AL norm (nH)	32.00	
AL max. (nH)	35.84	
AL min. (nH)	28.16	
DC bias at 0.8μi (Oe) typ.	80	
Power Losses (mW/cm ³) typ. 50kHz, 1000gauss	1000	
Total Losses (ohms/H/μi) typ. < 20gauss	0.0	

Magnetic Dimensions:

C1 (mm-1)	2.4008
Le (mm)	22.1
Ae (mm ²)	9.2
Ve (mm ³)	203.9

Special Comments

- 1.
2. AL band is +/- 12% for DuraFlux
- 3.

Note: the right to change specification data as required without notice is reserved.