


Core Data Sheet

Part Number: G50-86

Core Dimensions:

Uncoated (tol. +/-0.25)	After coating	
OD (mm) 10.16	(max)	10.81
ID (mm) 5.08	(min)	4.43
HT (mm) 3.96	(max)	4.61

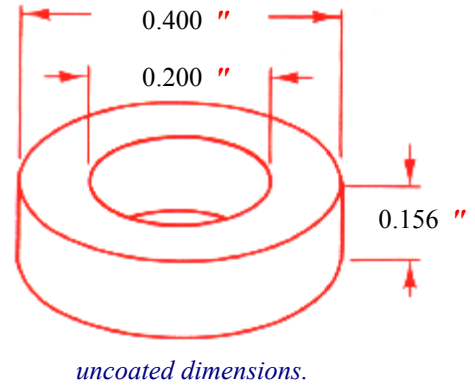

Physical Characteristics:

Winding area (cm ²)	0.16	Strength (N) typ.	71.2
Surface area (cm ²)	4.55	Weight (grams) typ.	1.81
Coating	Epoxy, Light Blue, 0.2 mm approx. per surface. Voltage breakdown 500Vac.		
Packing	Not available.		

Material:

Grade	86		
Initial Permeability (μi)	147	tol +/-	12
Description	High Flux - gas atomized 80 /20 nickel-iron alloy powder		

Electrical Data:

AL norm (nH)	78.00		
AL max. (nH)	84.24		
AL min. (nH)	71.76		
DC bias at 0.8μi (Oe) typ.	24		
Power Losses (mW/cm ³) typ. 50kHz, 1000gauss		600	
Total Losses (ohms/H/μi) typ. < 20gauss		0.0	

Magnetic Dimensions:

C1 (mm-1)	2.4008
Le (mm)	22.1
Ae (mm ²)	9.2
Ve (mm ³)	203.9

Special Comments

- 1.
2. AL band is +/- 12% for DuraFlux
- 3.

Note: the right to change specification data as required without notice is reserved.