


Core Data Sheet

Part Number: G51 - 96

Core Dimensions:

Uncoated (tol. +/-0.25)		After coating	
OD (mm)	9.65	(max)	10.30
ID (mm)	4.78	(min)	4.13
HT (mm)	3.18	(max)	3.83

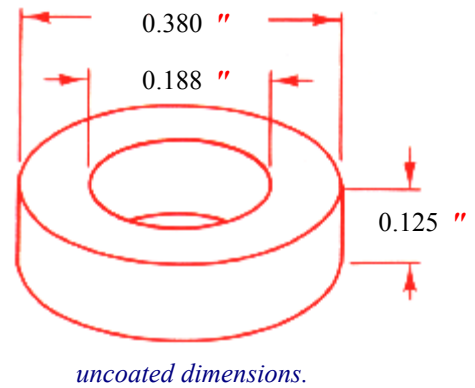

Physical Characteristics:

Winding area (cm ²)	0.14	Strength (N) typ.	54.8
Surface area (cm ²)	3.89	Weight (grams) typ.	1.39
Coating	Epoxy, Dark Blue, 0.2 mm approx. per surface. Voltage breakdown 500Vac.		
Packing	Not available.		

Material:

Grade	96		
Initial Permeability (μi)	147	tol +/-	12
Description	MPP - gas atomized 80 /20 nickel-iron alloy powder.		

Electrical Data:

AL norm (nH)	63.00		
AL max. (nH)	68.04		
AL min. (nH)	57.96		
DC bias at 0.8μi (Oe) typ.	22		
Power Losses (mW/cm ³) typ. 50kHz, 1000gauss	400		
Total Losses (ohms/H/μi) typ. < 20gauss	0.2		

Magnetic Dimensions:

C1 (mm-1)	3.0066
Le (mm)	20.9
Ae (mm ²)	7.0
Ve (mm ³)	145.3

Special Comments

- 1.
2. AL band is +/- 12% for DuraFlux
- 3.

Note: the right to change specification data as required without notice is reserved.